

## Use of Rectifier Diodes at Elevated Temperatures for Short Term Overloads

### Application Note

AN6147-2 March 2016 LN33413

Author: Colin Rout

#### Introduction:

In many applications the rating of the semiconductor is determined by the overload conditions rather than the normal continuous running operation. If the overload condition is of a short duration, of the order of one minute, then rectifier diodes can be operated at above their maximum rated junction temperature as long as the repetitive voltage is reduced.

#### Use of rectifier diodes at elevated temperatures

Many of the characteristics of a rectifier diode are temperature dependent, but for modest increases in junction temperature many of these changes are insignificant. However the leakage current will approximately double for every 10°C rise in junction temperature as illustrated in figure 1.

This increase in leakage current combined with the repetitive voltage  $V_{RRM}$  will result in increased power dissipation and potential thermal run-away of the equipment. By reducing the repetitive voltage the power dissipation during reverse blocking can be reduced to an acceptable level and the equipment allowed to ride out the overload without any problems. In this Application Note a method of estimating voltage de-rating is outlined.

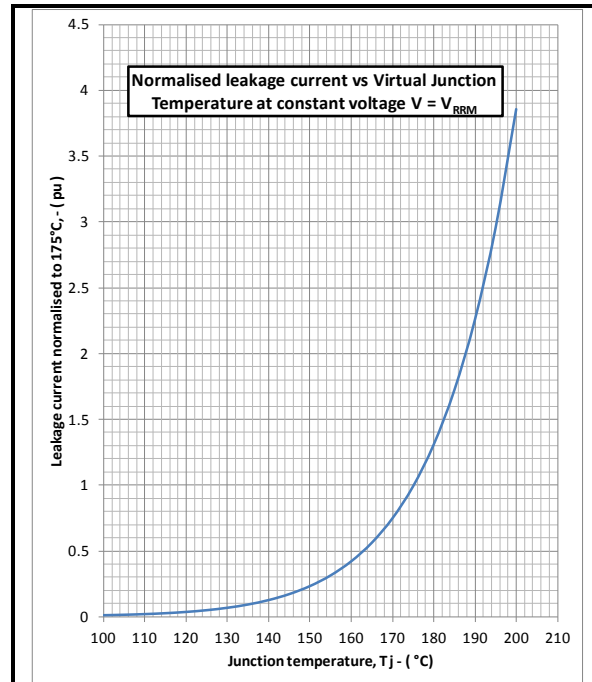


Fig. 1 Leakage current vs junction temperature

Fig. 2 shows the typical effect of voltage on leakage current. The leakage current is reduced by 50% if the voltage is reduced to 80% of  $V_{RRM}$ . Thus we can see that if the junction temperature approaches 190°C but we keep the  $V_{xl}$  product constant by reducing the voltage to 75% of  $V_{RRM}$ , the power dissipation will remain constant.

By combining Figure 1 with the inverse of figure 2 we obtain the useful graph given in figure 3. Voltage blocking of 50%  $V_{RRM}$  at 200° has been verified in the laboratory.

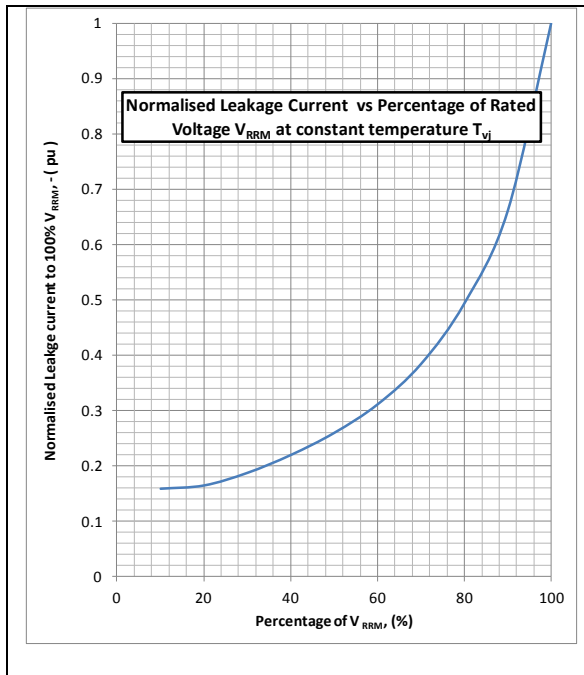


Fig.2 Leakage current vs % of the repetitive voltage VRRM

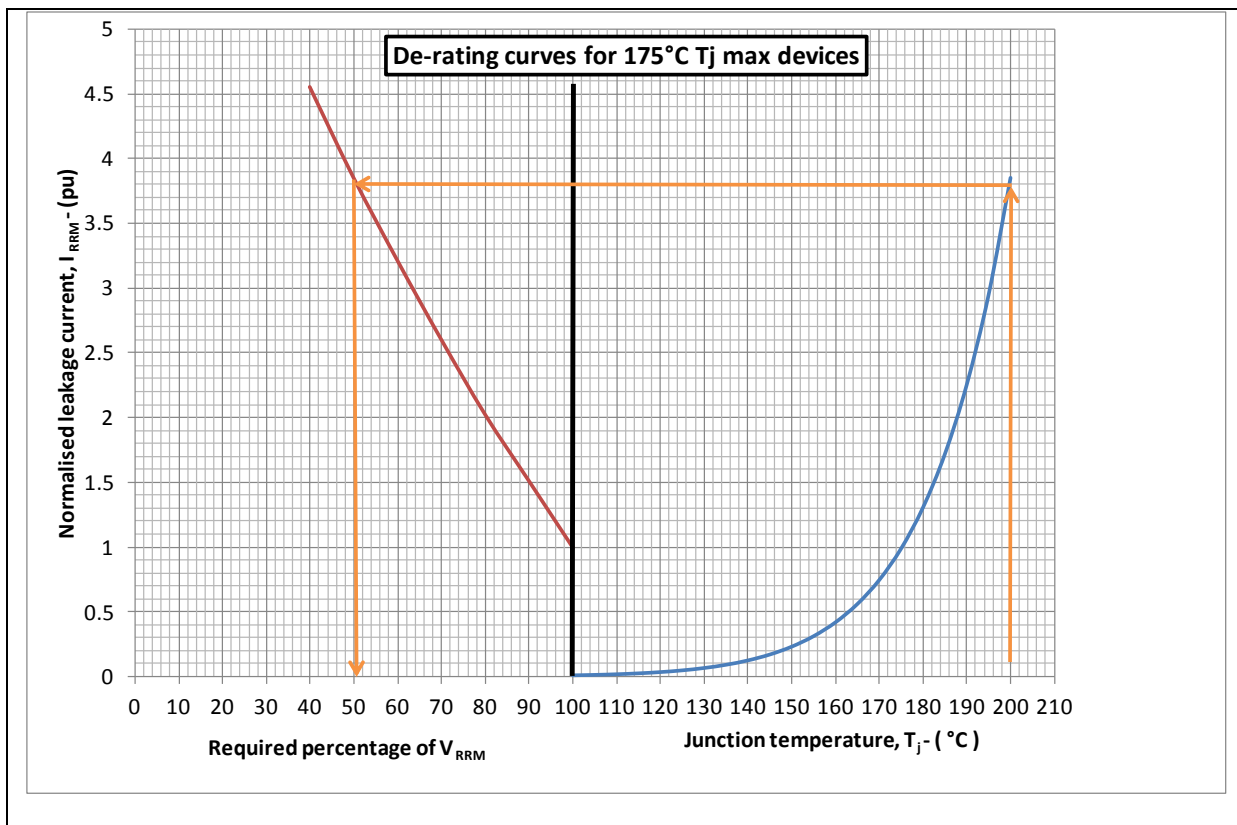


Fig3. Required percentage of VRRM for rectifier junction temperatures above 175°C

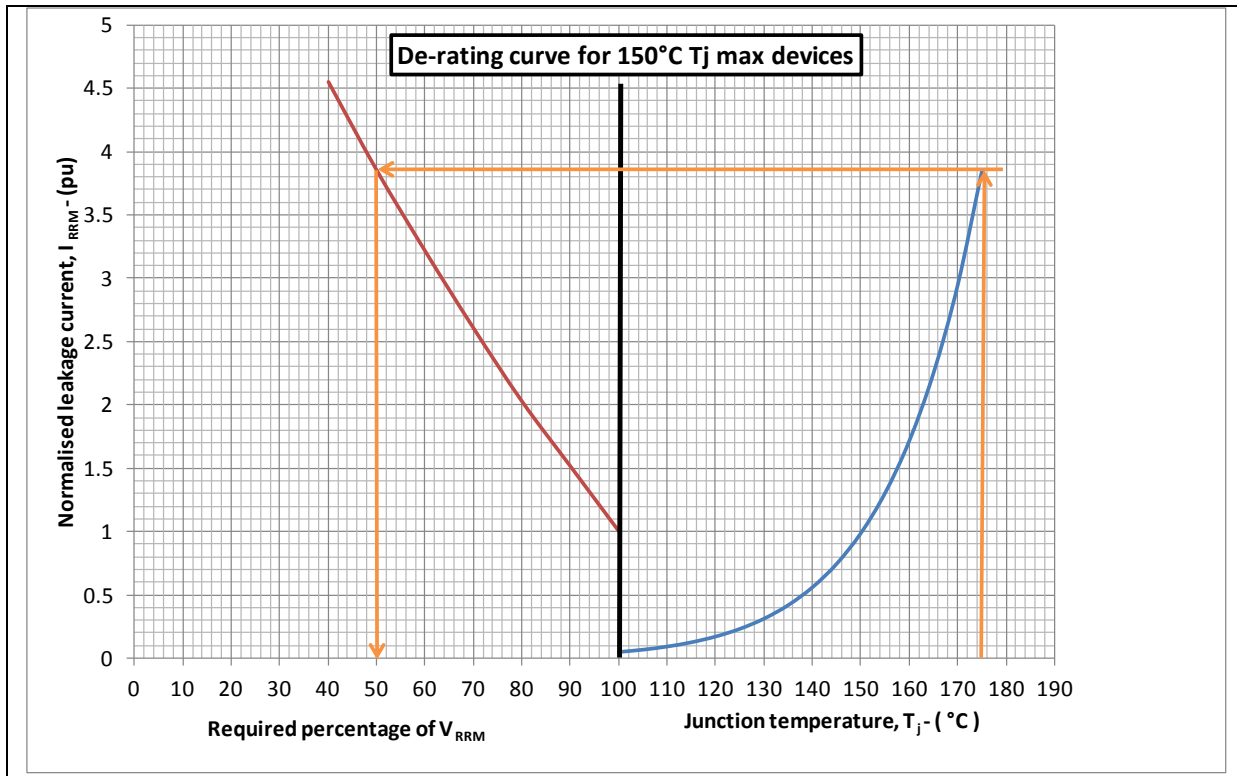


Figure 4 Required percentage of VRRM for rectifier junction temperatures above 150°C

Unfortunately, stored charge is a strong function of temperature as shown in fig.5 so

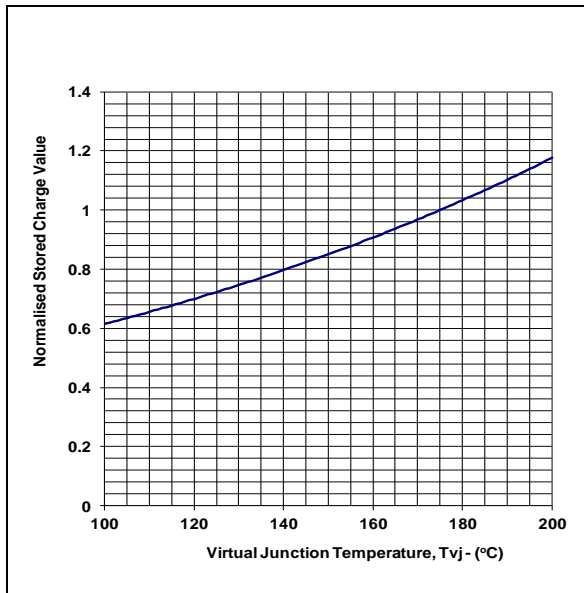


Fig 5 Stored Charge against Junction Temperature

the reverse recovery losses and the voltage overshoot during reverse recovery will also increase so the snubber design should also be reviewed to ensure that the diode is still operating within safe limits. Forward voltage drop may also increase. This can be seen by observing the cross-over point of the  $V_{fm}$  characteristics in the datasheet compared to the operating current. A linear extrapolation of the interval between the datasheet curves will give a reasonable approximation. These additional increases in conduction and recovery losses may mean that  $V_{RRM}$  has to be

further reduced to maintain device thermal stability.

The leakage current of a reverse biased diode is comprised of two components, the diffusion based current and the thermally generated current. At around 220°C, depending upon the resistivity of the silicon used to make the diode (or the avalanche voltage of the diode), the diffusion based current begins to dominate and the relationship between current and temperature changes so that this analysis no longer applies.

**IMPORTANT INFORMATION:**

This publication is provided for information only and not for resale.

The products and information in this publication are intended for use by appropriately trained technical personnel.

Due to the diversity of product applications, the information contained herein is provided as a general guide only and does not constitute any guarantee of suitability for use in a specific application. The user must evaluate the suitability of the product and the completeness of the product data for the application. The user is responsible for product selection and ensuring all safety and any warning requirements are met. Should additional product information be needed please contact Customer Service.

Although we have endeavoured to carefully compile the information in this publication it may contain inaccuracies or typographical errors. The information is provided without any warranty or guarantee of any kind.

This publication is an uncontrolled document and is subject to change without notice. When referring to it please ensure that it is the most up to date version and has not been superseded.

The products are not intended for use in applications where a failure or malfunction may cause loss of life, injury or damage to property. The user must ensure that appropriate safety precautions are taken to prevent or mitigate the consequences of a product failure or malfunction.

The products must not be touched when operating because there is a danger of electrocution or severe burning. Always use protective safety equipment such as appropriate shields for the product and wear safety glasses. Even when disconnected any electric charge remaining in the product must be discharged and allowed to cool before safe handling using protective gloves.

Extended exposure to conditions outside the product ratings may affect reliability leading to premature product failure. Use outside the product ratings is likely to cause permanent damage to the product. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture, a large current to flow or high voltage arcing, resulting in fire or explosion. Appropriate application design and safety precautions should always be followed to protect persons and property.

**Product Status & Product Ordering:**

We annotate datasheets in the top right hand corner of the front page, to indicate product status if it is not yet fully approved for production. The annotations are as follows:-

- |                                 |   |
|---------------------------------|---|
| <b>Target Information:</b>      | This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.  |
| <b>Preliminary Information:</b> | The product design is complete and final characterisation for volume production is in progress. The datasheet represents the product as it is now understood but details may change.  |
| <b>No Annotation:</b>           | The product has been approved for production and unless otherwise notified by Dynex any product ordered will be supplied to the <b>current version of the data sheet prevailing at the time of our order acknowledgement.</b> |

All products and materials are sold and services provided subject to Dynex's conditions of sale, which are available on request.

Any brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

**HEADQUARTERS OPERATIONS**

**CUSTOMER SERVICE**

DYNEX SEMICONDUCTOR LIMITED

Doddington Road, Lincoln, Lincolnshire, LN6 3LF

United Kingdom.

Phone: +44 (0) 1522 500500

Fax: +44 (0) 1522 500550

Web: <http://www.dynexsemi.com>

Phone: +44 (0) 1522 502753 / 502901

Fax: +44 (0) 1522 500020

e-mail: [power\\_solutions@dynexsemi.com](mailto:power_solutions@dynexsemi.com)