


Thyristor Modules

Features

- Blocking voltage: 1600 to 2000V
- Industrial standard package
- Thick copper baseplate
- 3000 V_{RMS} isolating voltage

Typical Applications

- Power Converters
- DC motor Control and Drives
- Temperature control
- *Lighting control*



Module Type		
Type	V _{DRM}	V _{RSM}
JKT350-16	1600V	1700V
JKT350-18	1800V	1900V
JKT350-20	2000V	2200V

Maximum Ratings				
Parameters	Symbol	Test Conditions	Values	Unit
Average On-State Current	I _{TAV}	Sine 180°C; T _C =85°C	350	A
Surge forward current	I _{TSM}	t=10ms T _J =125°C	9500	A
Maximum I ² t for fusing	I ² t	t=10ms T _J =125°C	451250	A ² s
Isolation Breakdown Voltage(R.M.S)	Visol	A _C 50Hz; R.M.S.; 1min	3000	V
		Ac.50Hz; R.M.S; 1sec	3500	V
Operating Junction Temperature	T _J		-40~+125	°C
Storage Temperature	T _{stg}		-40~+125	°C
Mounting Torque	Mt	To terminals(M8)	12±10%	Nm
	Ms	To heatsink(M6)	6±10%	
Maximum non-repetitive rate of rise of turned on current	di/dt	T _J =125°C, I _{TM} =660A ,I _g =1.5A tr<0.5us	100	A/us
Maximum critical rate of rise of off-state voltage	dv/dt	T _J =125°C, V _D =2/3V _{DRM}	1000	V/us
Weight			690	g

Electrical Characteristics

Parameters	Symbol	Test Conditions	Values			Unit
			Min.	Typ.	Max.	
Maximum Peak On-State Voltage	V_{TM}	$I_{TM} = 800A, T_J = 25^\circ C$			1.45	V
Maximum Repetitive Peak Reverse Current/ Maximum Repetitive Off-state Current	I_{RRM}/ I_{DRM}	$T_J = 125^\circ C, V_{RD} = V_{RRM}$			25	mA
On state threshold voltage	V_{TO}	For power-loss calculations only $T_J = 125^\circ C$			0.8	V
Maximum Value of on-state slope resistance	r_T	$T_J = 125^\circ C$			0.53	m Ω
Maximum gate voltage required to trigger	V_{GT}	$T_J = 25^\circ C, V_D = 6V$			2.5	V
Maximum gate current required to trigger	I_{GT}	$T_J = 25^\circ C, V_D = 6V$			120	mA
Maximum gate voltage that will not trigger	V_{GD}	$T_J = 125^\circ C, V_D = 2/3V_{DRM}$			0.20	V
Maximum gate current that will not trigger	I_{GD}	$T_J = 125^\circ C, V_D = 2/3V_{DRM}$			6	mA
Maximum Latching current	I_L	$T_J = 25^\circ C, I_G = 1.2I_{GT}$			1000	mA
Maximum Holding current	I_H	$T_J = 25^\circ C, I_T = 1A$			200	mA

Thermal Characteristics


Parameters	Symbol	Test Conditions	Values	Unit
Maximum internal thermal resistance, junction to case per leg	$R_{th(J-C)}$	Per thyristor	0.08	$^\circ C/W$
Typical thermal resistance, case to heatsink per module	$R_{th(C-S)}$	Module	0.04	$^\circ C/W$

Ordering Information Tabel
Device code

J	KT	350	-	16
①	②	③		④

- ① JBY's power module
- ② Circuit configuration
- ③ Maximum average forward current, A
- ④ Voltage code 1600V

Package Outline Information

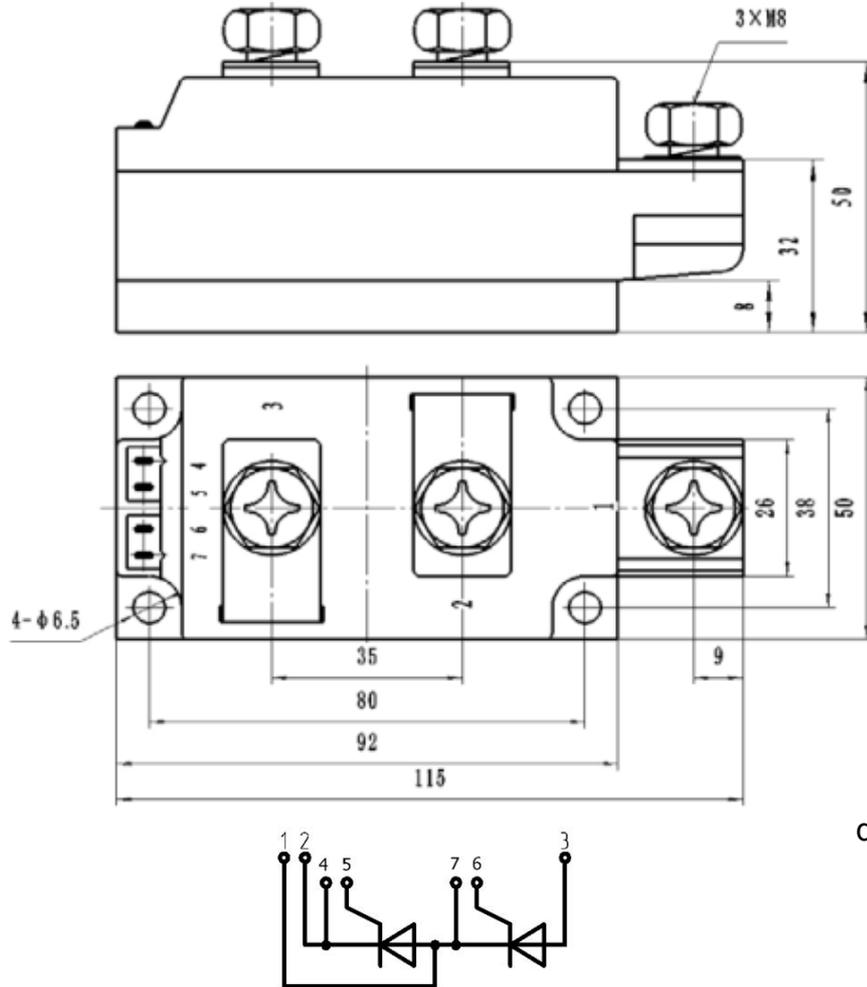

dimensions in mm